

KINETIC EFFECTS IN PLASMA PROCESSING DISCHARGES




M.A. Lieberman and E. Kawamura
Dept. EECS, UC Berkeley

I. 2D PARTICLE-IN-CELL (PIC) SIMULATIONS OF UNSTABLE WAVES EXCITED BY DOUBLE LAYERS

(with A.J. Lichtenberg and J.P. Verboncoeur)

Motivations: remote plasma processing; plasma thrusters

REACTOR CONFIGURATION

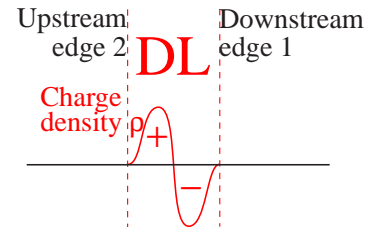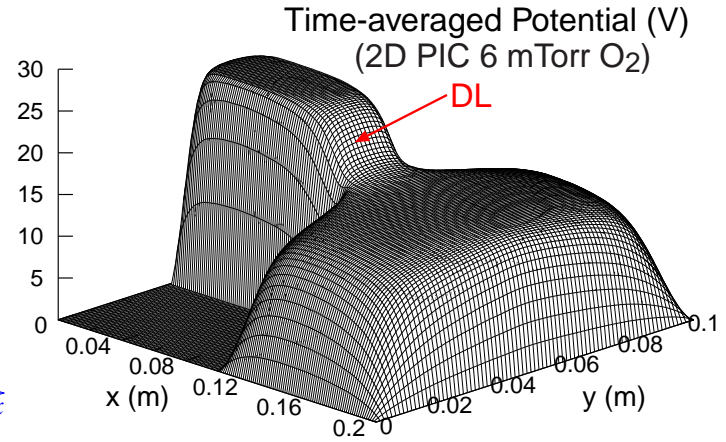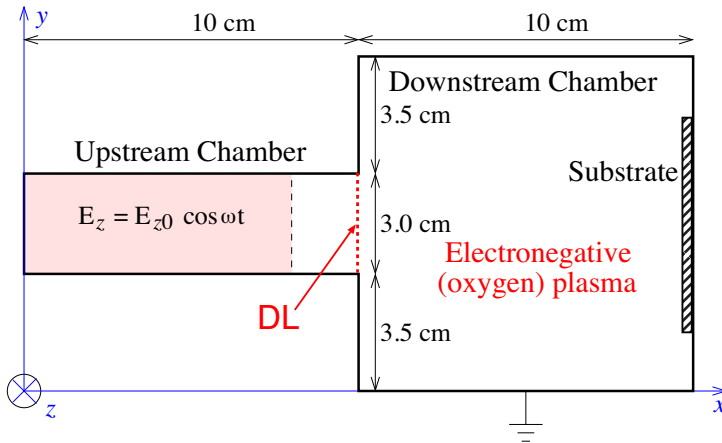

- DL's observed over a wide range of pressures (1–24 mTorr) (Kawamura et al, Phys. Fluids, 2009)
- DL's typically have time-varying (wave) structures

ABOUT 2D PIC SIMULATIONS



- Self-consistent results from first principles with no assumptions about electron and ion velocity distributions
- Stability, speed and accuracy require low densities:
$$n_e \approx 4 \times 10^{14} \text{ m}^{-3}, \lambda_D \approx 0.8 \text{ mm}$$
- Rescaled oxygen cross sections are used to simulate higher densities and other chemistries
- A typical simulation takes 1–2 weeks

MOVIE SHOWS SLOW AND FAST WAVES

Red: 900 kHz fast waves averaged over $0.1475 \mu\text{s}$ intervals


Blue: 85 kHz slow waves averaged over $1.18 \mu\text{s}$ intervals

160. Waves in 6 mTorr DL region (23.6 microseconds)

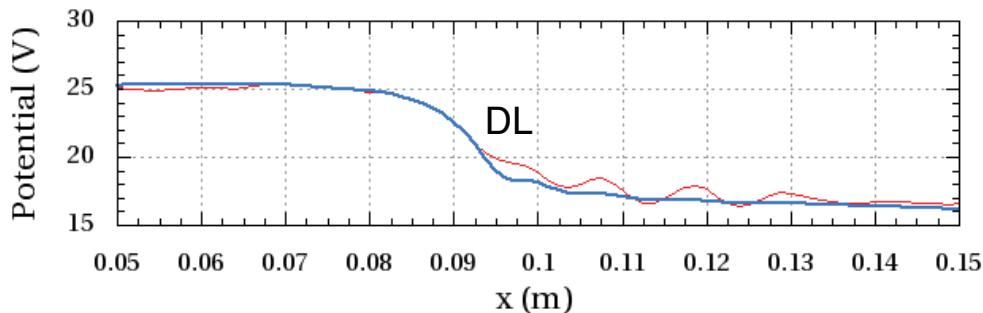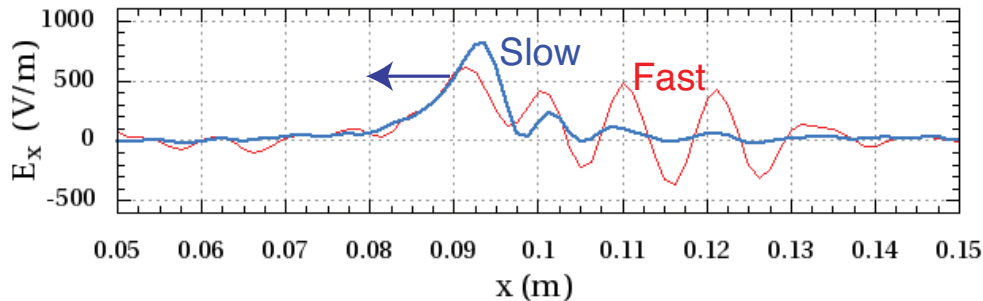

KINETIC THEORY OF UNSTABLE WAVES

- Waves produce 20% oscillations in DL potential and position
- Electron and ion kinetic effects are important

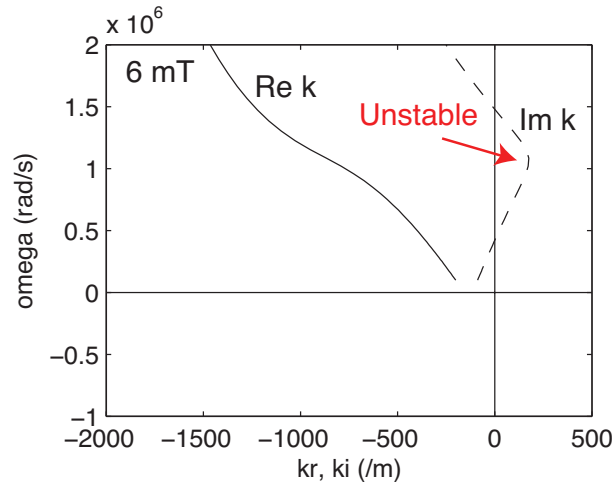

- Most unstable slow wave at $\lambda = 0.7$ cm at 173 kHz (PIC simulation gives $\lambda = 1$ cm at 85 kHz)
- Fast wave weakly damped at $\lambda = 0.7$ cm; excitation from nonuniformities and nonlinearities?

(Kawamura et al, to appear in J. Appl. Phys.)

PLSC100501

II. BULK-FLUID/ANALYTIC-SHEATH HYBRID SIMULATIONS


(with D.B. Graves)

Motivation: fast computation of plasma reactor parameters

BULK-FLUID/ANALYTIC-SHEATH MODEL

- Example of inductive reactor (Malyshev and Donnelly, 2000–01)


z Axisymmetric cylindrical geometry

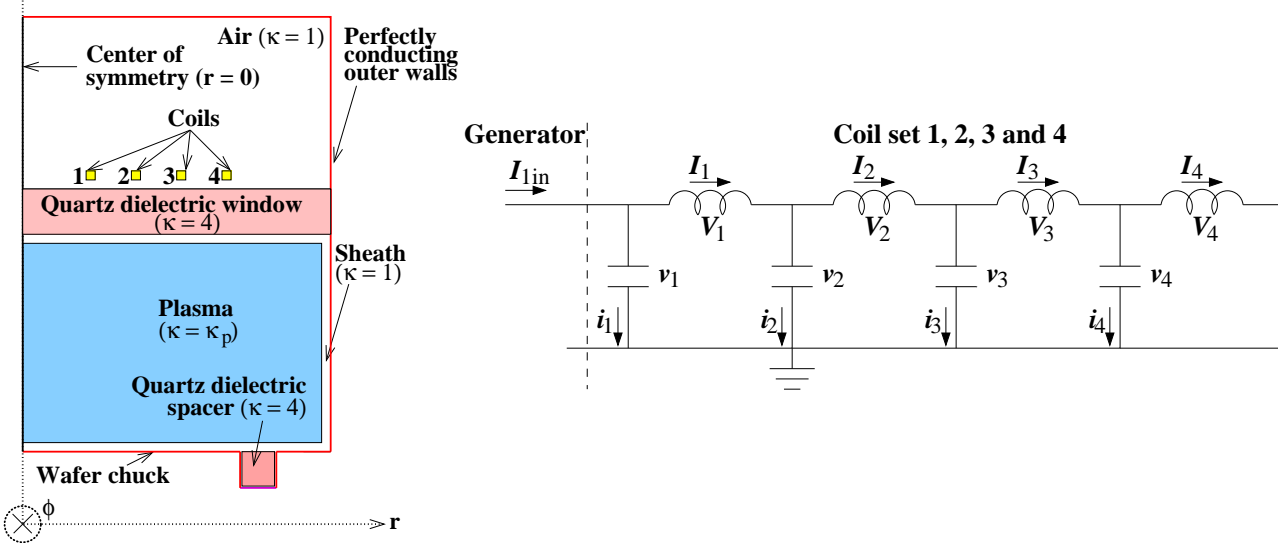

- Electromagnetic field solve (including wafer chuck rf bias)
- Fluid bulk plasma model
- Analytical sheath model
- Flow model of reactive gas
- Commercial software (COMSOL)


CHLORINE REACTOR SIMULATIONS

- 100 sccm Cl_2 gas flow, 10 mTorr at outlet, 740 W at 13.56 MHz
- Total simulation time \approx 70 min (2.2 GHz CPU 4GB RAM)
- Inductive \gg capacitive power, high gas T, high Cl_2 dissociation

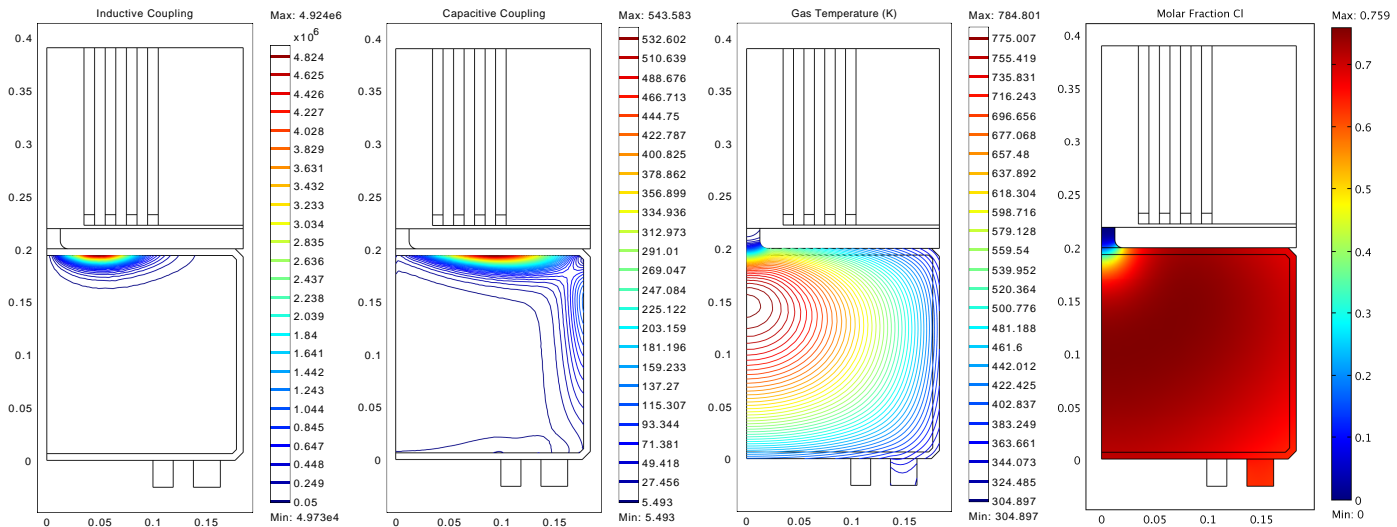


MODEL VERSUS EXPERIMENT


n_e vs. P_{abs} at Discharge Center

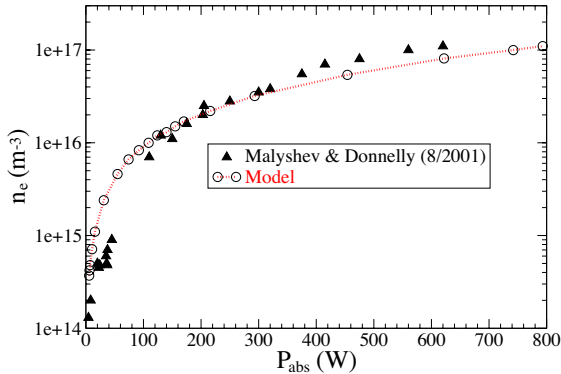


T_e vs. P_{abs} at Discharge Center

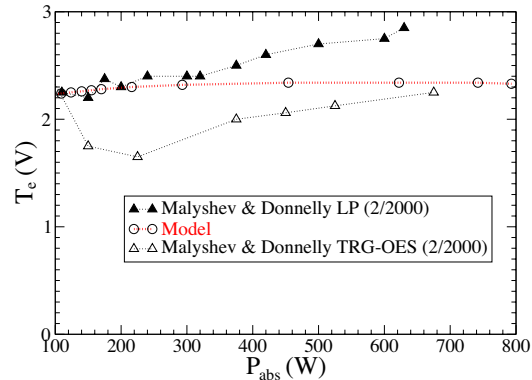

n_{gCl} vs. P_{abs} at Discharge Center

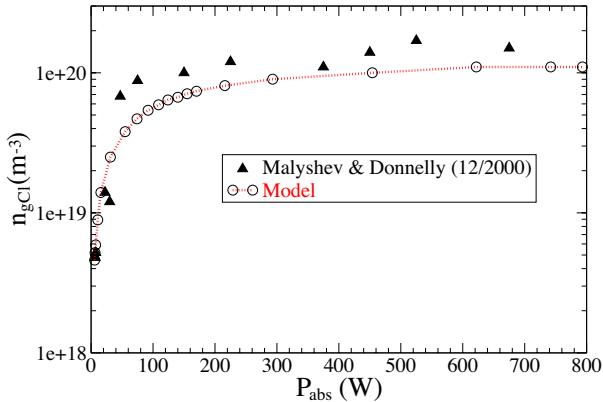


n_{gCl2} vs. P_{abs} at Discharge Center

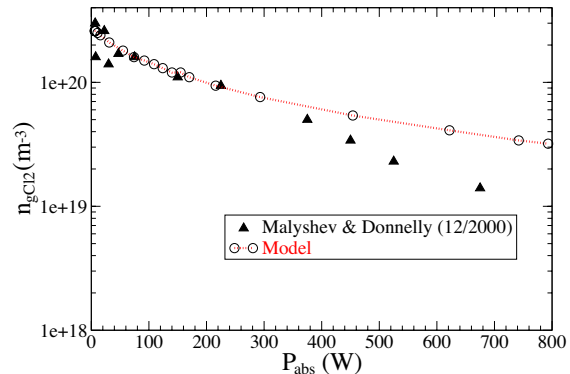

USING 1D/2D PIC SIMULATIONS

- Benchmark/verify assumptions of hybrid model
- Example of dual frequency excitation

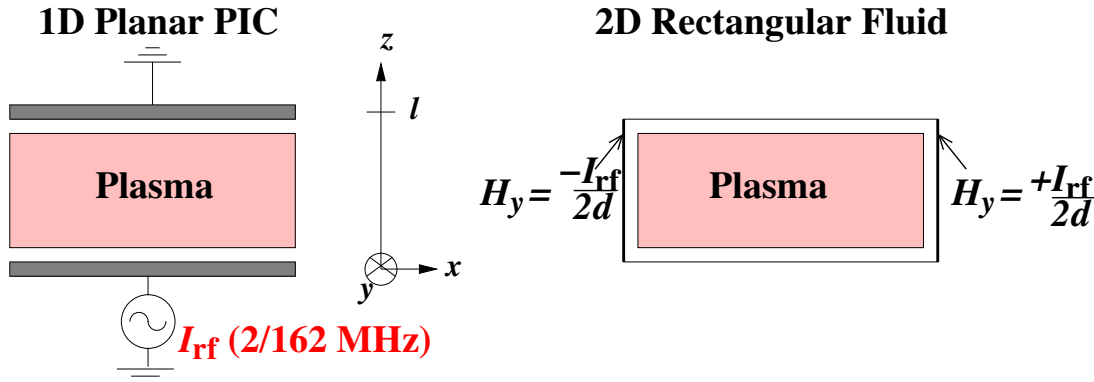

⇒ 1D PIC confirms analytical sheath model

- PIC simulations yield
 - electron energy distribution in bulk plasma
 - ion and fast neutral distributions on the substrate
- Couple PIC to hybrid model





III. OOPD1 — 1D PIC CODE DEVELOPMENT

(with J.P. Verboncoeur, J.T. Gudmundsson and A. Wu)

Motivation: Unified extensible code with easy-to-use interface



ENERGETIC PARTICLES ON THE SUBSTRATE

(20 mTorr O₂ capacitive discharge: 5 cm gap, 500 V at 13.56 MHz)

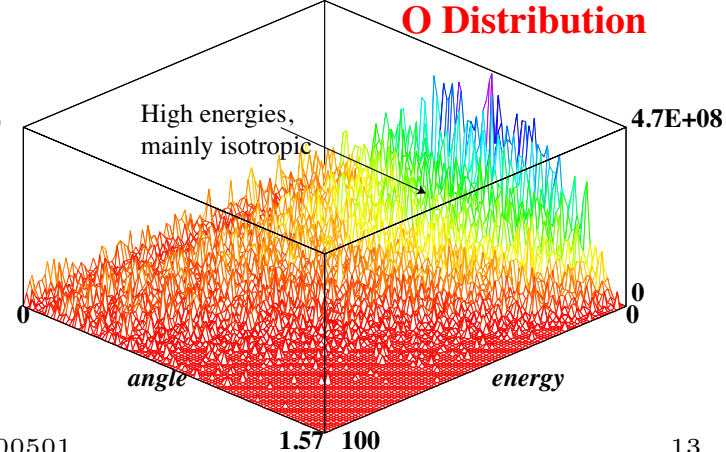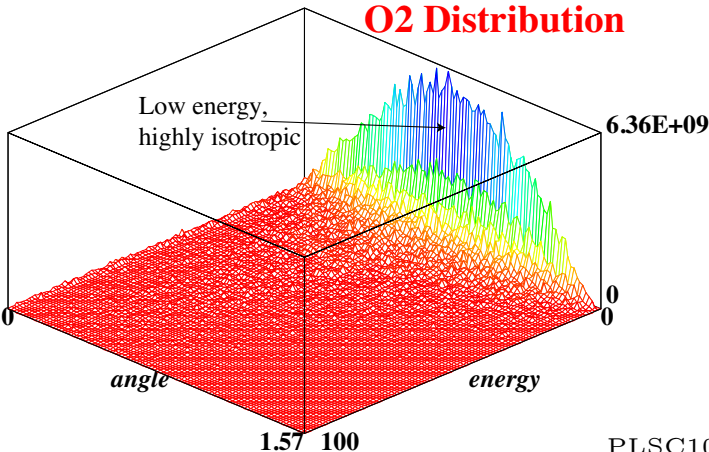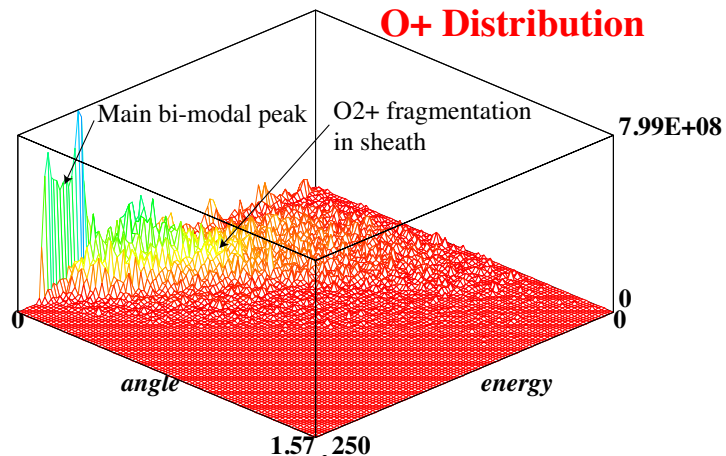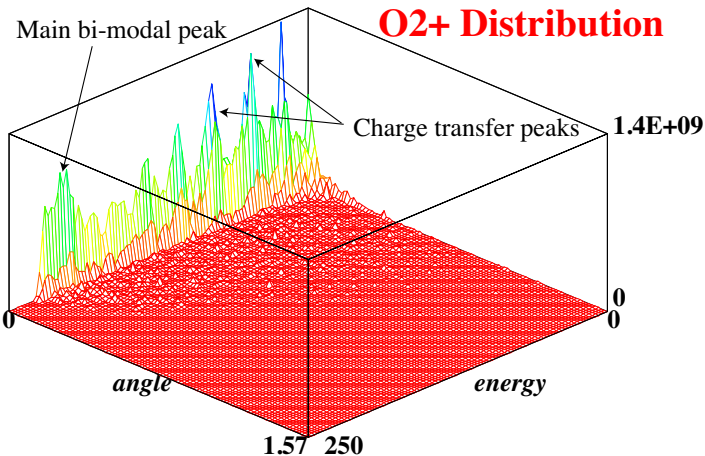


ION LOSS VELOCITIES IN MULTI-ION PLASMAS

- OOPD1 model of an argon/xenon experiment (see Lee, Hershkowitz and Severn 2007)
- Model results:

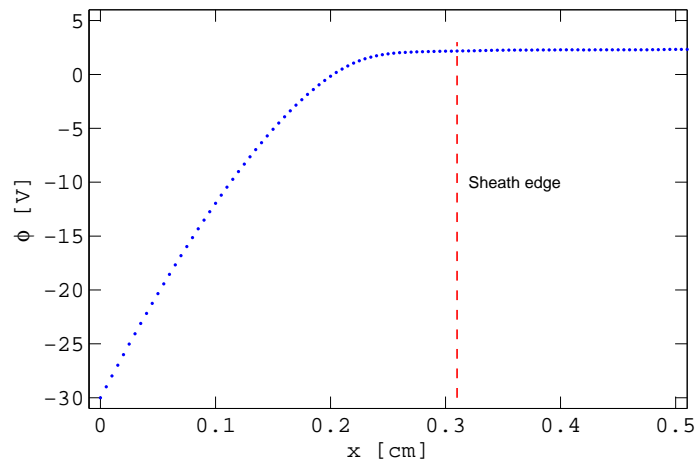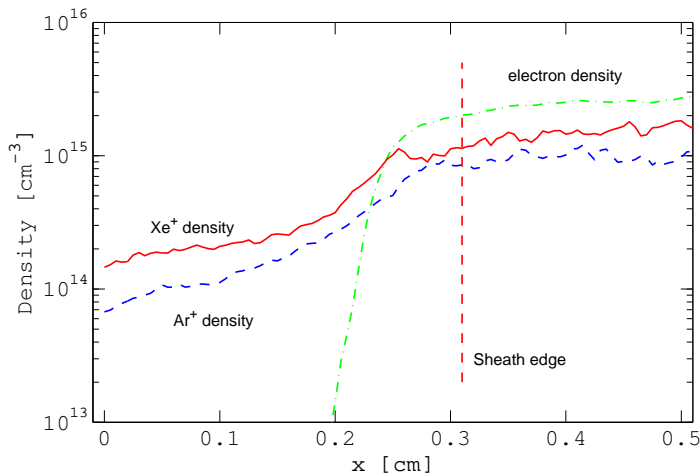

- Model sheath width = 0.31 cm, experiment = 0.27 cm
- Model $T_e = 0.49$ V, experiment = 0.69 V

ION VELOCITY SIMULATION RESULTS

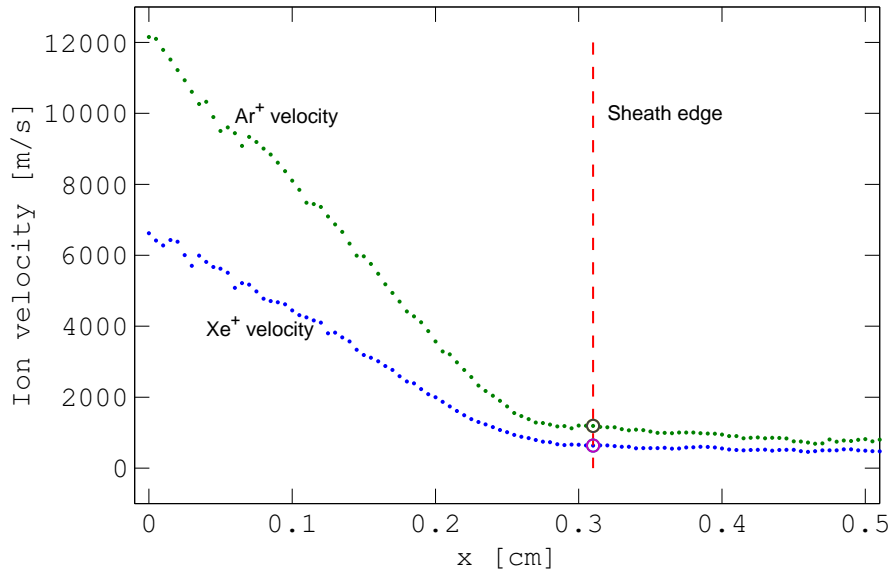

- Bohm velocities $\sqrt{eT_e/M_i} = 592$ m/s for Xe⁺ and 1073 m/s for Ar⁺
- Model velocities = 636 m/s for Xe⁺ and 1190 m/s for Ar⁺
- Experimental velocities = 940 m/s for Xe⁺ and 1100 m/s for Ar⁺
- This is work in progress